

COMPARISON OF WORKING COST

Model	Li-ion battery forklift	Lead acid battery forklift	IC forklift
1.5T	Charger: Robinsen 48V/15KW-250A	Charger: SHINENG CZB3-60A/48V	Xinchai485 engine
	1 hour charging: 15 degrees Charging for 1.7 hours: 20.2 degrees	1 hour charging: 2.88 degrees Charging for 10 hours: 28.8degrees	Normal working conditions: Fuel consumption 3 liters / hour
	Charge for 1.7 hours: 20.2 *1.02 conversion rate* 1.15 loss * 1 Electricity cost = 23.69 RMB	Charge for 10 hours: 28.8*1.2 conversion rate* 1.15 loss*1 electricity cost = 39.74 RMB	Cost per hour: 3 * 5.73 RMB = 17.19 RMB
	Full charge cost: 23.69 RMB Working time: 4-6 hours	Full charge cost: 39.74RMB Working time: 4-6 hours	Cost of working 5 hours per day: 5 * 17.19 = 85.95 RMB
	Cost per hour: 3.95-5.92RMB	Cost per hour: 6.62~9.94RMB	Cost per hour: 17.19 RMB
	Annual cost of 1,000 working hours: between 3950-5920 RMB	Annual cost of 1,000 working hours: between 6620~9940RMB	Annual cost of 1,000 working hours: 17,190 RMB
2.5T	Charger: Robinsen 80V/25KW-250A	Charger: SHINENG CZB3-80A/48V	Xinchai 490 engine
	1 hour charging: 25 degrees Charging for 1.2 hours: 30 degrees	1 hour charging: 3.84degrees Charging for 10 hours: 38.4degrees	Normal working conditions: Fuel consumption 4.5 liters / hour
	Charge for 2.3 hours: 30 * 1.02 conversion 1.15 loss * 1 electricity cost = 35.19 RMB	Charge for 10 hours: 38.4*1.2 conversion rate* 1.15 loss*1 electricity cost = 52.99 RMB	Cost per hour: 4.5*5.73 RMB = 25.79 RMB
	Full charge cost: 35.19RMB, Working time: 4-6 hours	Full charge cost: 52.99RMB Working time: 4-6 hours	Cost of working 5 hours per day: 5 * 25.79 = 128.95 RMB
	Cost per hour: 5.87-8.80RMB	Cost per hour: 8.83~13.25RMB	Cost per hour: 25.79RMB
	Annual cost of 1,000 working hours: between 5870-8800RMB	Annual cost of 1,000 working hours: between 8830~13250RMB	Annual cost of 1,000 working hours: 25,790 RMB



NOBLELIFT CHINA

Add:528 Changzhou Road,Taihu Sub-district,
Changxing, Zhejiang 313100 China
Tel:86-572-6210817 6210311
Fax:86-572-6210777 6128612
Email:info@noblelift.com
Http:www.noblelift.com www.noblelift.cn



Official website



Our Wechat

NOBLELIFT

NOBLELIFT
Electric Rough
Terrain Forklift



- 3-in-1**
- Designed for rough terrain application
 - Perform like an IC engine forklift
 - With Li-ion battery



GRADEABILITY

Up to **30%**, performance between diesel engine powered 2WD and 4WD, suitable for most of middle-low rough terrain application.

DRIVE SPEED

20 km/hours, the fastest electric forklift in market.

CHARGING TIME

Less than **2** hours, quick charge, high efficiency.

OVERALL WIDTH

1450 mm, designed for Orchard constrains.

LIFTING SPEED

380 mm/Sec, perform like a IC engine powered forklift.

LOWERED HEIGHT

2135 mm, allows container and door ways operation.

GROUND CLEARANCE

270 mm, high ground clearance for rough terrain application.



TURNING RADIUS

2730 mm, independent drive wheel, great maneuverability.



CONFIGURATIONS

Dimension	Overall width	1450mm	Designed for Orchard constrains
	Overall height	2150mm	Allows container and door ways operation
Productivity	Ground clearance	270mm	High ground clearance for rough terrain application
	Turning radius	2730mm	Independent drive wheel, great maneuverability
	Gradeability	30% with load	Meet with the requirements of most
	Drive speed	20km/hour	The fastest electric forklift in Market
	Lifting speed	400mm/Sec	Perform like a IC engine powered forklift
Green Power LI-ION	Working hours	4-6hours	Integrated BMS continually monitors energy management, ensure reliability
	Charging time	Less than 2 hours	Quick charge, high elciency
	Emission	no limitation in EU&US	Environmental friendly
Safety	Water proof		IP54 Water-proof standard
	Brakes	Wet-disc brake	Higher stability and reliability than traditional drum brakes
	Ops system		Ops system disable traction and operation device when driver leave seat
Ergonomic	Noise	73 Db	Operator hearing protection
	Vibration		Reduce the fatigue strength of the driver
	Operation space		Operating space more than 40% larger than conventional electric forklift
TOC total cost of ownership	Energy saving	10KWH/hour	60-70% operation cost lower than diesel powered engine
	Maintenance cost		Maintenance free no-brush AC motor, low service cost

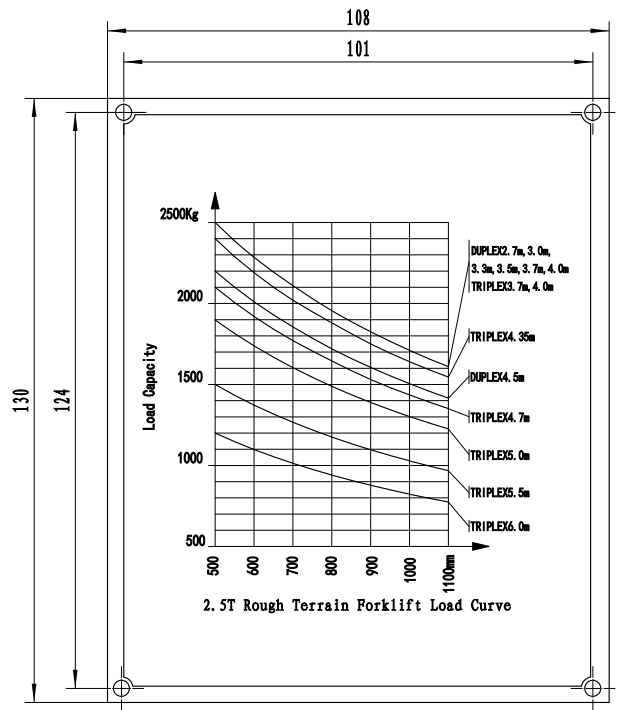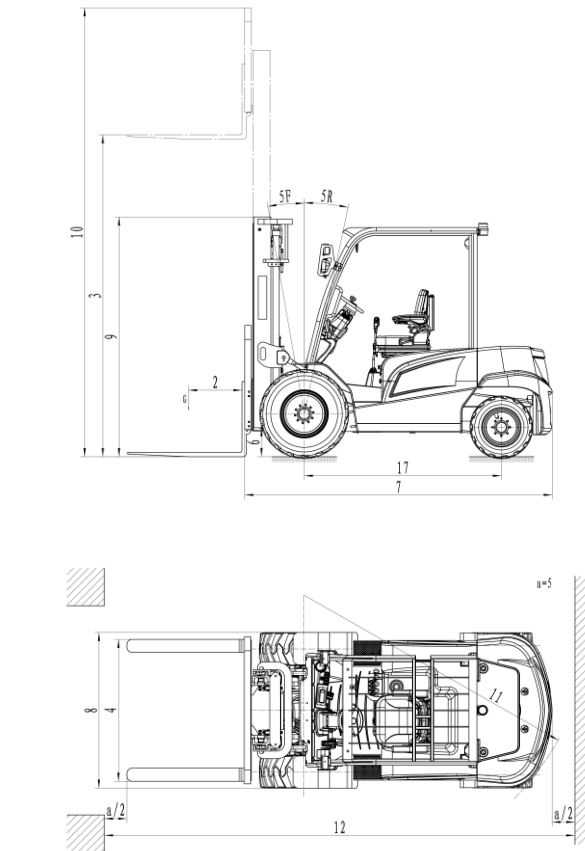

FORKLIFT SPECIFICATION

RT Series 1.8T & 2.5T

General								
	Model				FE2RT18-Li	FE2RT18-Pb	FE2RT25-Li	FE2RT25-Pb
1	Power Type				Li-ion battery	Lead-acid battery	Li-ion battery	Lead-acid battery
2	Load centre			mm	500	500	500	500
Characteristic&Dimension								
3	Lift height			mm	3000	3000	3000	3000
4	Fork regulating range	Min./Max.		mm	200-1000	200-1000	250-1160	200-1000
5	Mast tilt angle	F/R		Deg	10/12	10/12	10/12	10/12
6	Min.ground clearance			mm	270	270	270	270
7	Overall dimensions		Length to face of fork(without fork)	mm	2850	2850	2871	2871
Overall width			mm	1450	1450	1450	1450	
Mast lowered height			mm	2150	2150	2230	2230	
Mast extend height(with backrest)			mm	4145	4145	4170	4170	
11	Turning radius			mm	2730	2730	2730	2730
12	Min.right angle	a=1000,b=1200		mm	4800	4800	4860	4860
13	stacking aisle width	a=1200,b=800		mm	4400	4400	4460	4460
Performance								
14			Lifting(Laden)	mm/s	380	380	350	350
Lowering(Laden)			mm/s	450	450	450	450	
16	Max. Gradeability(Laden)			%	30	30	25	25
Tyre								
17	Wheelbase			mm	1840	1840	1840	1840
Weight								
18	Self weight			Kg	3640	3900	4480	4480
19	Weight Distribution		Laden	Front axle	Kg	4720	4850	6100
Rear axle				Kg	720	850	880	
21			Unladen	Front axle	Kg	1440	1600	1800
22				Rear axle	Kg	2200	2300	2680
Power&Transmission								
23	Battery	Voltage/Capacity		V/Ah	80/220	80/360	80/320	80/420
24	Motor	Manufacture			ZAPI	ZAPI	ZAPI	ZAPI
25	Transmission	Manufacture			PMP	PMP	PMP	PMP
26	Operating pressure			Mpa	14.5	14.5	17.5	17.5